



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03368043.0

Der Präsident des Europäischen Patentamts:
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

THIS PAGE BLANK (USPTO)



Anmeldung Nr:
Application no.: 03368043.0
Demande no:

Anmeldetag:
Date of filing: 29.04.03
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

INTERNATIONAL BUSINESS MACHINES CORPORATION

Armonk, NY 10504
ETATS-UNIS D'AMERIQUE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Method and system enabling the cancellation of a previously-sent e-mail message

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

H04L29/00

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT RO SE SI SK TR LI

THIS PAGE BLANK (USPTO)

**METHOD AND SYSTEM ENABLING THE CANCELLATION OF A
PREVIOUSLY-SENT E-MAIL MESSAGE**

Technical field

5 The present invention relates generally to communications by electronic mails (e-mails) through a data transmission network based upon the Internet protocol (IP) such as the Internet network, and relates in particular to a method and a system for canceling an e-mail message which has previously be sent to one or several recipients.

10 **Background**

15 The electronic mail (e-mail) provides a quick and convenient way for the Internet users over the world to communicate between them. Such a communication is initiated by a message sender composing a message which optionally includes joined files and addressing the message to one recipient or several recipients.

Once a message has been composed and a "send" key has been activated, the message will be delivered to each of the addressed recipients automatically, provided that valid e-mail

destination addresses have been used in the message. A message may pass through a number of separate server computers, generally servers SMTP also called Message Transfer Agents (MTA) before reaching its final destination. The action of
5 each MTA is defined as a "store and forward" which means that each message is temporarily stored and then forwarded when the MTA has an appropriate channel available.

One characteristic of the Internet network is that once a message is submitted to the Internet, this one takes the
10 responsibility to deliver the message and the latter becomes an independent entity (no longer under the control of the sender). This means that, once the message has been transmitted over the Internet, it cannot be directly altered, canceled or retracting by the originating sender.

15 However, in some situations, an e-mail user can use an unsent operation. Assuming that the sender sent the message to a wrong recipient or forgot to include an important item in the message, he may wish to stop transmission of the message before this one reaches the recipient. In certain software
20 packages, this operation is possible by pressing an "undo" key. But, there is a difficulty with the "undo" function for e-mail insofar as the operation usually involves a number of independent servers not under the control of the user software.

25 Some e-mail systems provide a central repository for e-mail. Using this type of e-mail system, the message sender composes the message and sends the message to the recipient. The e-mail system saves the message in the e-mail repository until the recipient retrieves the message. In such a system, the sender
30 can stop delivery of the message if the recipient has not yet retrieved the message because the message remains within the scope of control of the originating e-mail system.

Another messaging scheme is the Usenet Network News facility (netnews) that is well known to the art. Netnews has a "cancel" feature that allows the author of a message to send a follow-up cancel message that causes the recipient computers to remove the original message from their news directory. This netnews feature relies on the standardized nature of netnews - all recipient computers are programmed to process cancel messages.

But in the above systems, the problem is that, once an e-mail has passed beyond the control of the originating sender, the e-mail cannot be canceled. This problem has been solved in systems wherein a cancel message is sent by the sender to all the recipients of the first message. Such a cancel message is either a duplicate message of the original message including a canceling tag or an action message including some information contained in the original message. Once this second message is received by the recipient, both original message and cancel message are deleted if the original message has not been read by the recipient.

Unfortunately, the above mechanism relates only to means for canceling messages which have not yet been read without looking for whether some recipients have already read the message. This means that some recipients, among the recipients who had to read the e-mail, will be able to take some decisions whereas other recipients will not be able to take the decisions since they will not have received the e-mail, which results in a possible discrepancy. Such a solution is not acceptable in some cases wherein an action must be achieved by all the recipients or by none of them. Therefore, there is a need to have a mechanism enabling to send an e-mail to each designated recipient or, conversely, to cancel this e-mail for all recipients.

Summary of the invention

Accordingly, the main object of the invention is to achieve a method and to provide a system enabling canceling of an e-mail forwarded by a sender to one or several recipients only when none of these recipients has read the e-mail.

5

The invention relates therefore to a system enabling the cancellation of a previously-sent e-mail comprising a data transmission network such as the Internet network wherein a plurality of users are connected to the network, each user
10 being able as a sender to forward an e-mail over the network to at least another user as a recipient connected to the network, and wherein a message transfer agent MTA is associated with each user for sending the e-mail when the user acts as a sender and delivering the e-mail when the user acts
15 as a recipient. Each MTA includes a cancel mailbox for transmitting a cancellation message to the recipient(s) when the user associated with the MTA is a sender wanting to cancel a previously-sent e-mail or for managing the cancellation of e-mails in the mailbox of the user associated with the MTA
20 upon receiving the cancellation message from the sender when this user is a recipient.

According to another aspect, the method of canceling a previously-sent e-mail consists in

- 25 - sending from the sender a message (DELETE) for deleting the e-mail to a cancel mailbox included in the MTA,
- sending from the cancel mailbox included in the sender MTA a message (DELETE-MAIL) to a cancel mailbox included in each MTA respectively associated with each recipient being addressed in the e-mail in order to inform them that the
30 e-mail has to be deleted if it is not yet read,
- sending from the cancel mailboxes of the MTAs respectively associated with the recipients a message (SUSPEND) requesting that the e-mail has to be masked only if it has not yet been read, and

- deleting or not the masked e-mail according to whether none of the recipients has read the e-mail or not.

Brief description of the drawings

The above and other objects, features and advantages of the invention will be better understood by reading the following more particular description of the invention in conjunction with the accompanying drawings wherein :

- Fig. 1 is a first embodiment of a data transmission system enabling the cancellation of a previously-sent e-mail message according to the invention,
- Fig. 2 is a time diagram of the messages which are exchanged for canceling a previously-sent e-mail in the system illustrated in Fig. 1 when the e-mail has not yet been read,
- Fig. 3 is a time diagram of the messages which are exchanged for the cancellation of a previously-sent e-mail in the system illustrated in Fig. 1 when the e-mail has already been read by a recipient,
- Fig. 4 is a second embodiment of a data transmission system enabling the cancellation of previously-sent e-mail message according to the invention,
- Fig. 5 is a time diagram of the messages which are exchanged between the cancel mailboxes for the cancellation of a previously-sent e-mail in the system illustrated in Fig. 4 when the e-mail has not yet been read,
- Fig. 6 is a time diagram of the messages which are exchanged between the cancel mailboxes for the cancellation of a previously-sent e-mail in the system illustrated in Fig. 4 when the e-mail has already been read by a recipient.
- Fig. 7 is a schematic representation of the tables being used in a MTA device for the implementation of the method according to the invention,
- Fig. 8 is a flowchart of the steps which are achieved for building the MTA tables illustrated in Fig. 7,

- Fig. 9 is a flowchart of the steps which are achieved in a sender MTA upon receiving a cancellation e-mail,
- Fig. 10 is a flowchart of the steps which are achieved in an intermediate or deliver MTA upon receiving a cancellation message,
- Fig. 11 is a flowchart of the steps which are achieved in any MTA for performing the method of cancellation of an e-mail according to the invention.

Detailed description of the invention

- 10 In reference to Fig. 1, a user 10 called the sender wants to send an e-mail or several e-mails through the Internet network 12 to several other users called the recipients such as users 14, 16 and 18. It is of no importance if there is a primary recipient and that the other recipients are copied.
- 15 For each user, there is a server SMTP or Mail Transfer Agent (MTA) which is responsible to issue the messages from a mailbox or to deliver the messages in a mailbox. Thus, for user 10, it is MTA 20 which receives the e-mails from user 10 and which is in charge to send them to the recipients.
- 20 Assuming that MTA 22 is associated with the domain A including the addresses of user A1 14 and user A2 16, the e-mails are sent from MTA 20 to MTA 22 which delivers the messages in the mailbox of user 14 and of the mailbox of user 16. Likewise, if it is another MTA 24 which is in charge of the address of user
- 25 B1 18, the e-mails are forwarded from MTA 20 to MTA 24 which delivers the message in the mailbox of user B18.

- It is assumed now that the sender 10 wants to cancel one of its previously-sent e-mails for any reason. It issues a cancellation message containing the message to be canceled.
- 30 According to the principles of the invention, the cancellation message is received by a cancel mailbox associated with MTA 20. This cancel mailbox of the sender is responsible to manage

the process of cancellation via a flow of actions described in the following and using a cancel mailbox 28 associated with MTA 22 and a cancel mailbox 30 associated with MTA 24.

5 As illustrated in Fig. 2, the sender sends a cancellation message DELETE to the cancel mailbox of the sender. Upon receiving this message, the cancel mailbox of the sender forwards a message DELETE-MAIL to the cancel mailbox of MTA A and also to the cancel mailbox of MTA B. Upon receiving this message, the cancel mailbox A sends a message SUSPEND to the
10 mailbox of each recipient A1 and A2. Likewise, upon receiving the message DELETE-MAIL, the cancel mailbox B sends a message SUSPEND to the mailbox of the recipient B1.

15 Assuming that the e-mail previously sent by the sender has not been read by any one of the recipients, each mailbox sends back a message SUSPEND-OK to the associated cancel mailbox as illustrated in Fig. 2, meaning that the message which has not yet been read will not be supplied to the recipient.

20 Upon receiving the message SUSPEND-OK from the recipient mailbox, the cancel mailbox forwards immediately a message DELETE-PENDING to the cancel mailbox of the sender, meaning that the deletion of the initial e-mail is pending.

25 Assuming that the cancel mailbox of the sender receives a message DELETE-PENDING from all the cancel mailboxes, it knows that the e-mail has not been read by any one of the recipients and that it may be deleted. Accordingly, the cancel mailbox of the sender forwards a message DELETE-COMMIT to all the cancel mailboxes. Upon receiving the message, each cancel mailbox delivers a message SUPPRESS to the mailbox of the associated recipients, that is recipients A1 AND A2 for cancel mailbox A
30 and recipient B1 for cancel mailbox B, meaning that the e-mail must be deleted. At the same time, the cancel mailbox of the sender sends an acknowledgment message DELETE-OK to the sender

in order to keep the latter aware that the message has been deleted for all recipients.

In a second situation illustrated in Fig. 3, the e-mail previously sent by the sender has already been read by one of the recipients. It is assumed that it is recipient A2 which has already read the previously-sent e-mail. In such a case, the mailbox of recipient A2 sends back a message SUSPEND-KO to the cancel mailbox A upon receiving the message SUSPEND from the latter meaning that it is not possible to suspend reading of the e-mail. Upon receiving the message, the cancel mailbox A sends a message DELETE-FAILED to the cancel mailbox of the sender. Accordingly, the cancel mailbox of the sender has received messages from all the cancel mailboxes associated to the recipients. But at least one of these messages is a message DELETE-FAILED and not a message DELETE PENDING as for all the other cancel mailboxes. Then, the sender cancel mailbox sends back an acknowledgment message DELETE-KO to the sender mailbox meaning that the e-mail will not be deleted since at least one recipient has already read the e-mail. At the same time, the cancel mailbox of the sender forwards a message DELETE-ROLLBACK to all the cancel mailboxes associated with the recipients to inform them that they have to cancel the suspended deletion. Upon receiving the message DELETE-ROLLBACK, the cancel mailbox delivers a message ACTIVATE to the mailbox of each recipient who has not yet read the e-mail, such a message being useless for a recipient having read the e-mail.

In reference to Fig. 4, another case is when there is an intermediary MTA between the MTA associated with the sender and the MTAs associated with the recipients. Such an intermediary MTA exists when it is responsible of a specific domain name or of a distribution list. In such a case, the e-mail is first sent from MTA 20 associated with the sender to the intermediary MTA 32. This one is then in charge of

forwarding the e-mail to each MTA associated with the recipients of the e-mail, that is MTA 22 for the recipients 14 and 16 and MTA 24 for the recipient 18. As for the other MTAs, the intermediary MTA 32 includes a cancel mailbox 34 responsible to manage the process of cancellation. It must be noted that, in a more complex situation, it would be possible to have more than one intermediary MTA, all the intermediary MTAs constituting a hierarchy of MTAs associated with sub-domains included each in larger domain and so on.

As illustrated in Fig. 5, the cancel mailbox of the sender sends a message DELETE-MAIL to the cancel mailbox of the intermediate MTA. But, instead of delivering a message SUSPEND directly to the recipients as it was the case in reference to Fig. 2 and 3, the intermediate cancel mailbox sends also a message DELETE-MAIL to cancel mailboxes A and B. The message DELETE-MAIL would be forwarded again to a subsequent intermediate cancel mailboxes if there were a hierarchy of MTAs. If the e-mail has not yet been read by any recipient, the cancel mailboxes associated with the recipients forward back a message DELETE-PENDING to the intermediate cancel mailbox which also returns a message DELETE-PENDING to the cancel mailbox of the sender. Upon receiving this message or several messages DELETE-PENDING if there are several intermediate MTAs, the cancel mailbox of the sender forwards a message DELETE-COMMIT to the intermediate cancel mailbox(es), such a message being forwarded again by all the intermediate mailboxes of the hierarchy to the cancel mailboxes responsible to deliver a message SUPPRESS to the mailboxes of the recipients. The remaining steps of this process are identical to the steps described previously in reference to Fig. 2.

Assuming that one of the recipients has already read the e-mail, the message which is returned by the cancel mailbox as illustrated in Fig. 6 is not DELETE-PENDING but DELETE FAILED as already explained in reference to Fig. 3. The same message

is transferred from the intermediate cancel mailbox to the cancel mailbox of the sender. As previously, a message DELETE-ROLLBACK is sent from the cancel mailbox of the sender to the intermediate cancel mailbox (and to all the intermediate cancel mailboxes if any), and finally to the cancel mailbox B responsible to activate the e-mail in the mailboxes of the other recipients since the e-mail will not be deleted inasmuch as one of the recipients has already read it.

It must be noted that an intermediate MTA repeats, in both directions, any message received from the cancel mailbox of a MTA toward another MTA such as the deliver MTA in one direction or such as the sender MTA in the other direction.

A cancellation agent is associated with each cancel mailbox. A cancellation agent is a program in charge of reading the messages from the user mailboxes located in the associated domain to check whether a message is not yet read. The actions of the cancellation agent in the mailbox are the following :

"Identifying an unread e-mail" in response to the message DELETE-MAIL,

"Mask an unread e-mail" before sending the message DELETE-PENDING,

"Unmask an unread message" after receiving the message DELETE-ROLLBACK",

"Delete an e-mail" after receiving the message DELETE-COMMIT.

When a message 40 issued either by a user agent (UA) in case of DELETE or by a mail transfer agent (MTA) in case of DELETE-MAIL, is received by a MTA, the cancellation agent of the MTA builds a set of tables as illustrated in Fig. 7. First, it parses the recipient addresses received with the e-mail in order to build a Recipient table 42. Such a table includes for each addressed recipient the MTA with which the recipient is associated. If the address corresponds to a

distribution list, this distribution list is expanded. If an alias is found, the alias is replaced by the address of the aliased user.

5 Then, the Recipient table (corresponding to SDLST in Fig. 7) is scanned to build a Delete Process Table 44 for each e-mail to be deleted wherein each entry corresponds to the name of the recipient. For each entry, two fields are defined in the table, the type that is UA (for User agent) or MTA, and the status corresponding to the entry. As described in the
10 following, this field is modified according to which kind of message is received by the UA or the MTA.

Finally, both the Delete Process table 44 and the Recipient table 42 are mapped in a Mail Delete table 46 which is unique for each MTA. Assuming that, for an e-mail identified by XX, a
15 Recipient table SDLST and a Delete Process table DPT have been built, the Mail Delete table 46 will include for the entry XX, SDLST pointing to the identified Recipient table and DPT pointing to the identified Delete Process table.

20 It must be noted that some MTAs can use aliases to mask their current mail infrastructure. Thus, an e-mail could be sent to john@ibm.com whereas the final address after converting the alias address is in fact john@lagaude33.ibm.com. In some cases, a domain name is managed by a MTA forwarding incoming messages for the domain. In all these cases, the problem is
25 solved by the intermediate cancel mailbox responsible of the domain wherein the cancellation agent has access to the Domain Name Server (DNS).

The process achieved in cancel mail box for canceling an e-mail received by the MTA depends on whether this MTA is the
30 sender MTA, an intermediate MTA or the deliver MTA. For all MTAs, there is a first state, STATE 1, as illustrated in Fig. 8. At the beginning, the cancel mailbox of the MTA receives a

message DELETE or DELETE-MAIL (step 50). As described in reference to Fig. 7, the cancellation agent creates a recipient table SDLST (step 52). As there can be several recipients, a loop of steps is achieved. At the beginning, it is determined whether there is still a recipient to process (step 54). If so, it is determined whether the recipient name is an alias (step 56). If it is not the case, it is determined whether the received address corresponds to a distribution list (step 58). If so, it is determined whether there is another element to process in the distribution list (step 60) and if so, this element is added in the table SDLST (step 62) before checking again whether there is any more element in the distribution list.

When the recipient name is an alias, the aliased address is added in the table (step 64) and when the address does not correspond to a distribution list, the address is added in the table SDLST (step 66). In both cases and after all the elements of a distribution list have been added in the table, the process is looped back to the beginning for determining whether there is another recipient (step 54).

If there is no more recipient in the address list of the e-mail, the delete process table is created by the cancellation agent as described above (step 68). Such a creation being a loop of steps as long as there is still an element to be put in the table, it is first determined whether there is a new element for the delete process table (step 70). If it is the case, the process is different according to whether the MTA associated with the recipient address is a User agent (UA) or not (step 72). If it is an UA, this means that the recipient is under the control of this UA and a message SUSPEND is sent from the cancel mailbox of the UA to the mailbox of the recipient (step 74). If it is not the case, the cancel mailbox sends a message DELETE-MAIL to the MTA associated with the recipient (step 76). After the

transmission of the message SUSPEND or DELETE-MAIL, the process is looped back to the determination of a new element for the delete process table (step 70). Note that, if there is no new element to be processed in the delete process table, a timer T1 is set (step 78) and the process goes to STATE 2.

STATE 2 is different according to whether the MTA is the sender MTA or another MTA such as an intermediate MTA or the deliver MTA. If it is the sender MTA, the process achieved in STATE 2 is illustrated by the flow chart of Fig. 9. At the beginning, the process is waiting for an event (step 80). When such an event is detected, it is determined whether it corresponds to the time out of Time 1 (step 82). If it is not the case, it is determined whether the event corresponds to a message SUSPEND OK sent directly from the recipient mailbox or a message DELETE-PENDING sent from a MTA (step 84). If it is the case, the delete process table is updated by writing the message in the status field of the entry corresponding to the recipient address (step 86). After that, it is determined whether the answers corresponding to all the recipients have been received (step 88). If not, the process is looped back to the step of waiting for an event (step 80).

When all answers from the recipient mailboxes have been received, the cancellation agent forwards a message SUPPRESS to the recipient mailbox or a message DELETE-COMMIT to the MTA (step 90) and at the same time sends a message DELETE-OK to the sender (step 92). But, when the event being received is the time out from timer T1 or the message is not SUSPEND-OK or DELETE-PENDING, this means that the e-mail has already been read, the received message being SUSPEND-KO or DELETE-FAILED. In such a case, the cancel mailbox forwards a message ACTIVATE to the recipient mailbox or a message DELETE-ROLLBACK to the MTA (step 94). At the same time, it sends a message DELETE-KO to the sender to inform it that the e-mail will not be deleted because one of the recipients has already read the e-mail. In

all cases, after sending the message, the process leaves STATE 2 for coming back to STATE 1.

Fig. 10 illustrates STATE 2 when the MTA is an intermediate MTA or deliver MTA. At the beginning, the process is waiting for an event (step 100). When such an event is detected, it is determined whether it corresponds to the time out of timer T1 (step 102). If it is not the case, it is determined whether the event corresponds to a message SUSPEND OK sent directly from the recipient mailbox or a message DELETE-PENDING sent from a MTA (step 104). If it is the case, the delete process table is updated by writing the message in the status field of the entry corresponding to the recipient address (step 106). After that, it is determined whether the answers corresponding to all the recipients have been received (step 108). If not, the process is looped back to the step of waiting for an event (step 100).

When all answers from the recipient have been received, the MTA forwards a message DELETE-PENDING to the preceding intermediate MTA or the sender MTA (step 110). But, when the event received is the time out of Timer T1 or the message is not SUSPEND-OK or DELETE-PENDING, this means that the e-mail has already been read, the message being SUSPEND-KO or DELETE-FAILED. In such a case, the cancel mailbox forwards a message DELETE-FAILED to the preceding intermediate MTA or the sender MTA (step 112) and a Timer T2 is set (step 114). In all cases, after sending the message, the process leaves STATE 2 for inputting a STATE 3.

STATE 3 illustrated in Fig. 11 starts with a step of waiting for an event (step 116). It is first determined whether the event is the time out of timer T2. If it is not the case, it is determined whether the message which has been received is DELETE-COMMIT (step 120) meaning that the e-mail has not been

read by any one of the recipients. If so, it is necessary to know the recipients who are addressed in the e-mail. Therefore, a loop is started by determining whether there is still an element to be checked in the delete process table (step 122). If it is the case, it is determined whether this element (a recipient name) corresponds to a user agent (step 124). If so, this means that the MTA is a deliver MTA and it has to send a message SUPPRESS to the recipient mailbox in order to delete the e-mail (step 126). If it is not an UA, it is an intermediate MTA and the cancellation agent of the MTA has to send a message DELETE-COMMIT to the following MTA which can be an intermediate MTA or the deliver MTA (step 128). After sending a message SUPPRESS or DELETE-COMMIT, the process is looped back to the step of checking the next element in the delete process table (step 122).

When the event is the time out of timer T2 or is not a message DELETE-COMMIT, this means that the e-mail has already been read by at least one of the recipients. It is therefore necessary to know the recipients in order to inform them that the e-mail will not be deleted. As previously, a loop is started by determining whether there is an element to be checked in the delete process table (step 130). If it is the case, it is determined whether the element (a recipient name) corresponds to a user agent (step 132). If so, this means that the MTA is a deliver MTA and it has to send a message ACTIVATE to the recipient mailbox meaning that the e-mail may be read by the recipient (step 134). If it is not an UA, it is an intermediate MTA and the cancellation agent of the MTA sends a message DELETE-ROLLBACK to the following MTA which can be an intermediate MTA or the deliver MTA (step 136). After sending a message ACTIVATE or DELETE-ROLLBACK, the process is looped back to the step of checking the next element in the delete process table (step 130). Note that, if there is no more element to be checked in the delete process table either when the event is the time out of timer T2 or in any case upon

reception of a message, STATE 3 is completed and the process goes again to STATE 1.

CLAIMS

1. System enabling the cancellation of a previously-sent e-mail comprising a data transmission network (12) such as the Internet network wherein a plurality of users are connected to said network, each of said users being able as a sender (10) to forward an e-mail over said network to at least another user as a recipient (14, 16, 18) connected to said network, and wherein a message transfer agent MTA (20, 22, 24) is associated with each of said users for sending the e-mail when said user acts as a sender and delivering the e-mail when said user acts as a recipient,

said system being characterized in that each MTA includes a cancel mailbox (26, 28, 30) for transmitting a cancellation message to said recipient(s) when the user associated with said MTA is a sender wanting to cancel a previously-sent e-mail or for managing the cancellation of e-mails in the mailbox of the user associated with said MTA upon receiving said cancellation message from said sender when this user is a recipient.

2. System according to claim 1, wherein there is at least an intermediate MTA (32) between the MTA (20) associated with said sender (10) and said MTA associated with said recipients (14, 16, 18), said intermediate MTA including a cancel mailbox in charge of transmitting a cancellation message to said MTAs (22, 24) associated to said recipients upon receiving said cancellation message from said MTA associated with said sender.

3. System according to claim 1 or 2, wherein the cancel mailbox (26, 28, 30, 34) in said MTA (20, 22, 24, 32) is associated with a cancellation agent which is a program in

charge of managing the cancellation of said e-mail, said cancellation agent building a delete process table giving the status of said e-mail during the cancellation process managed by said cancellation agent.

- 5 4. Process of cancellation of a previously-sent e-mail in a
system comprising a data transmission network (12) such as
the Internet network wherein a plurality of users are
connected to said network, each of said users being able
as a sender (10) to forward an e-mail over said network to
10 at least another user as a recipient (14, 16, 18)
connected to said network, and wherein a message transfer
agent MTA (20, 22, 24) is associated with each of said
users for sending the e-mail when said user acts as a
sender and delivering the e-mail when said user acts as a
15 recipient ;

said process consisting in :

- a) sending from said sender (10) a message (DELETE)
for deleting said e-mail to a cancel mailbox included in
said MTA (20),
20 b) sending from said cancel mailbox included in the
sender MTA a message (DELETE-MAIL) to a cancel mailbox
included in each MTA (22, 24) respectively associated with
each recipient (14, 16, 18) being addressed in said e-mail
in order to inform them that said e-mail has to be deleted
25 if it is not yet read,
c) sending from said cancel mailboxes of said MTAs
respectively associated with said recipients a message
(SUSPEND) requesting that said e-mail has to be masked
only if it has not yet been read, and
30 d) deleting or not said masked e-mail according to
whether none of said recipients has read said e-mail or
not.

5. Process according to claim 4, wherein a cancel mailbox of
a MTA associated with a recipient sends back an

acknowledgement message of a first type (SUSPEND-OK) if said recipient has not yet read said e-mail.

5 6. Process according to claim 5, wherein the cancel mailbox of the MTA associated with several recipients sends back a first type message (DELETE-PENDING) to said sender MTA if none of these recipients has already read said e-mail.

10 7. Process according to claim 6, wherein said step d) consists in sending from the cancel mailbox of said sender MTA a message (DELETE-COMMIT) to the cancel mailboxes of the MTAs associated with all the recipients addressed in said e-mail requesting them to delete said e-mail.

15 8. Process according to claim 7, wherein said step d) further comprises the step of sending a message (SUPPRESS) from said cancel mailboxes of the MTAs associated with all recipients to the recipient mailboxes in order to delete said e-mail.

20 9. Process according to claim 7 or 8, wherein the cancel mailbox of said sender MTA sends a first type acknowledgment message (DELETE-OK) to the mailbox of said sender to confirm that said e-mail has been deleted.

10. Process according to claim 4 or 5, wherein a cancel mailbox of a MTA associated with a recipient sends back an acknowledgment message of a second type (SUSPEND-KO) if said recipient has already read said e-mail.

25 11. Process according to claim 10, wherein the cancel mailbox of the MTA associated with several recipients sends back a second type message (DELETE-FAILED) to said sender MTA if at least one of these recipients has already read said e-mail.

12. Process according to claim 11, wherein said step d) consists in sending from the cancel mailbox of said sender MTA a message (DELETE-ROLLBACK) to the cancel mailboxes of the MTAs associated with the recipients who have not yet read said e-mail requesting not to delete said e-mail.
13. Process according to claim 12, wherein said step d) further comprises the step of sending a message (ACTIVATE) from said cancel mailboxes of the MTAs associated with the recipients who have not yet read said e-mail to the mailboxes of said recipients in order not to delete said e-mail.
14. Process according to claim 12 or 13, wherein the cancel mailbox of said sender MTA sends a second type acknowledgment message (DELETE-KO) to the mailbox of said sender to confirm that said e-mail has not been deleted.
15. Process according to any one of claims 4 to 14, wherein there is at least one intermediate MTA between said sender MTA and the MTAs associated with said recipients, said intermediate MTA being adapted to repeat any message received from the cancel mailbox of sender MTA or from the cancel mailbox of any other MTA.
16. Process according to claim 15, wherein at least one of said recipients is addressed by an alias, the cancel mailbox of the MTA receiving said alias being adapted to send a request to an associated domain name server (DNS) in order to get the address corresponding to said alias.

**METHOD AND SYSTEM ENABLING THE CANCELLATION OF A
PREVIOUSLY-SENT E-MAIL MESSAGE**

Abstract

System enabling the cancellation of previously-sent e-mail
5 comprising a data transmission network (12) such as the
Internet network wherein a plurality of users are connected to
the network, each user being able as a sender (10) to forward
an e-mail over the network to at least another user as a
recipient (14, 16, 18) connected to the network, and wherein a
10 message transfer agent MTA (20, 22, 24) is associated with each
user for sending the e-mail when the user acts as a sender and
delivering the e-mail when the user acts as a recipient. Each
MTA includes a cancel mailbox (26, 28, 30) for transmitting a
cancellation message to the recipient(s) when the user
15 associated with the MTA is a sender wanting to cancel a
previously-sent e-mail or for managing the cancellation of
e-mails in the mailbox of the user associated with the MTA upon
receiving the cancellation message from the sender when this
user is a recipient.

20 FIG. 1

THIS PAGE BLANK (USPTO)


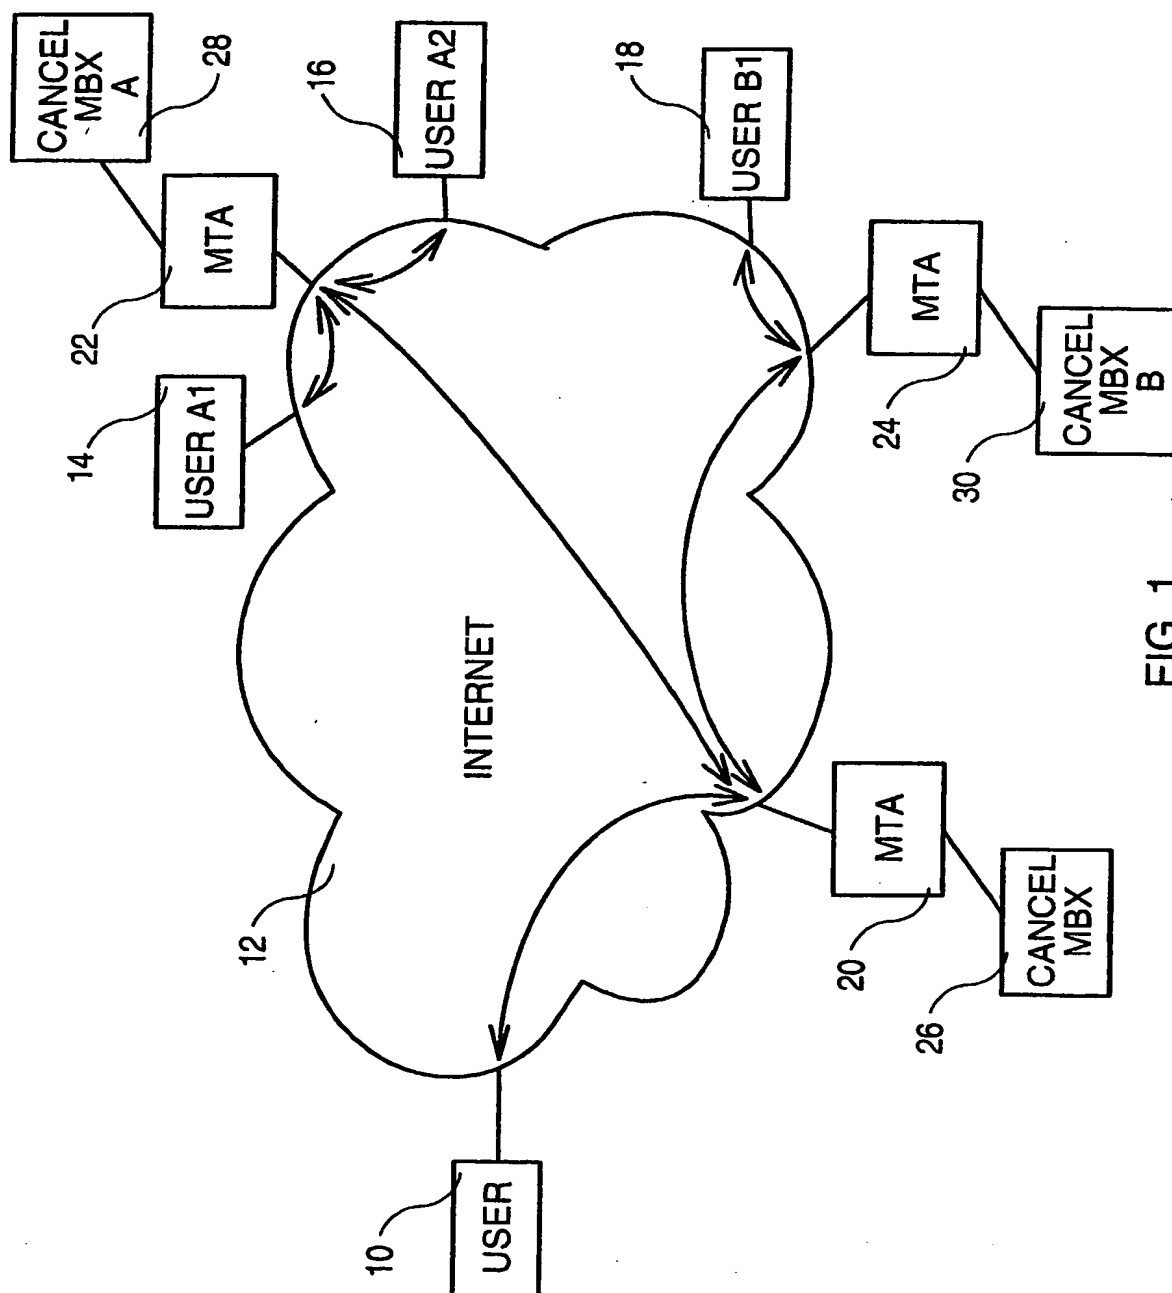


FIG. 1

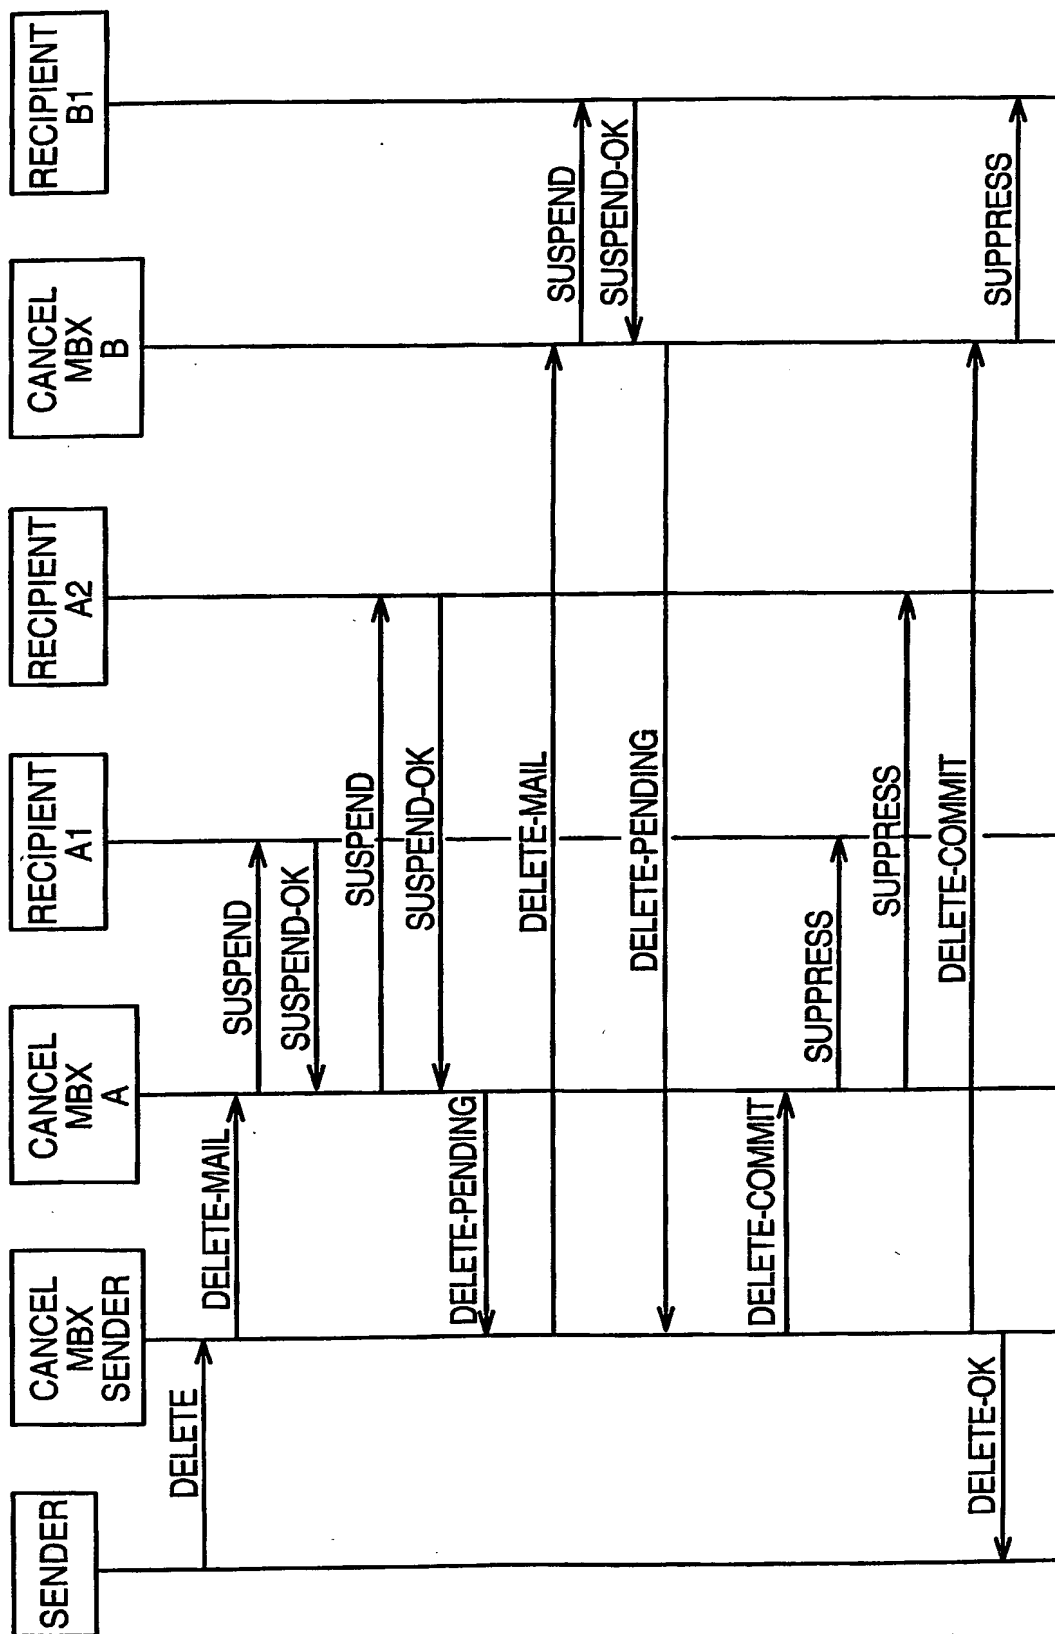

3/11

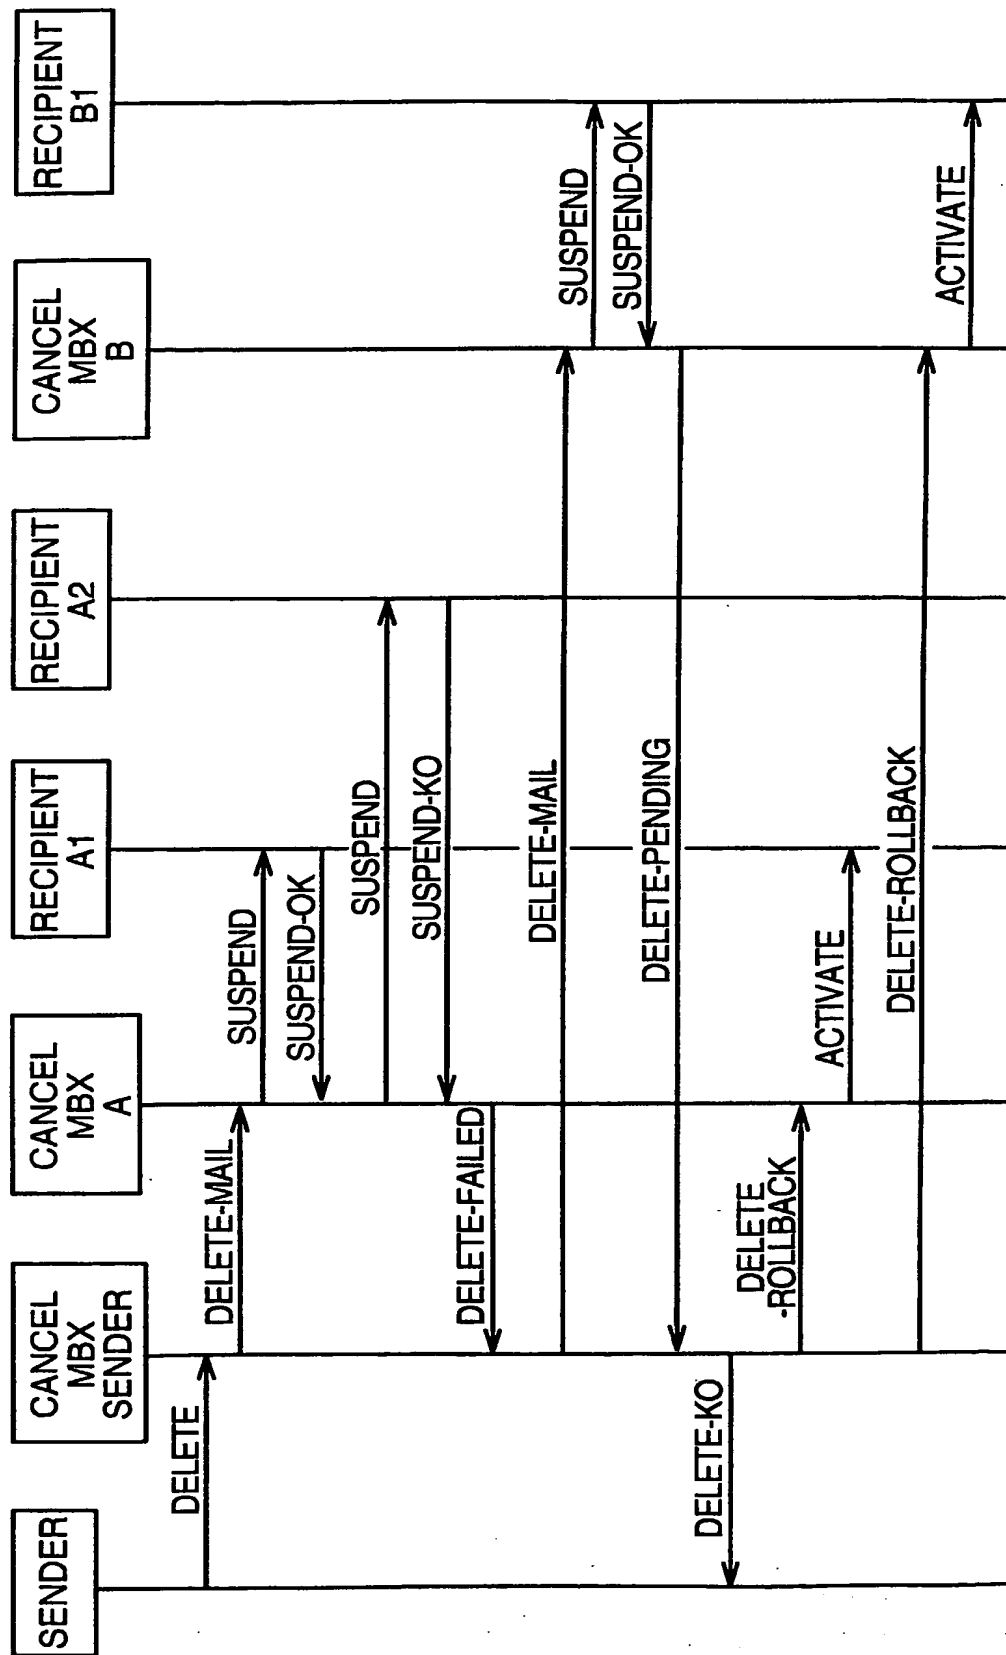


FIG. 3

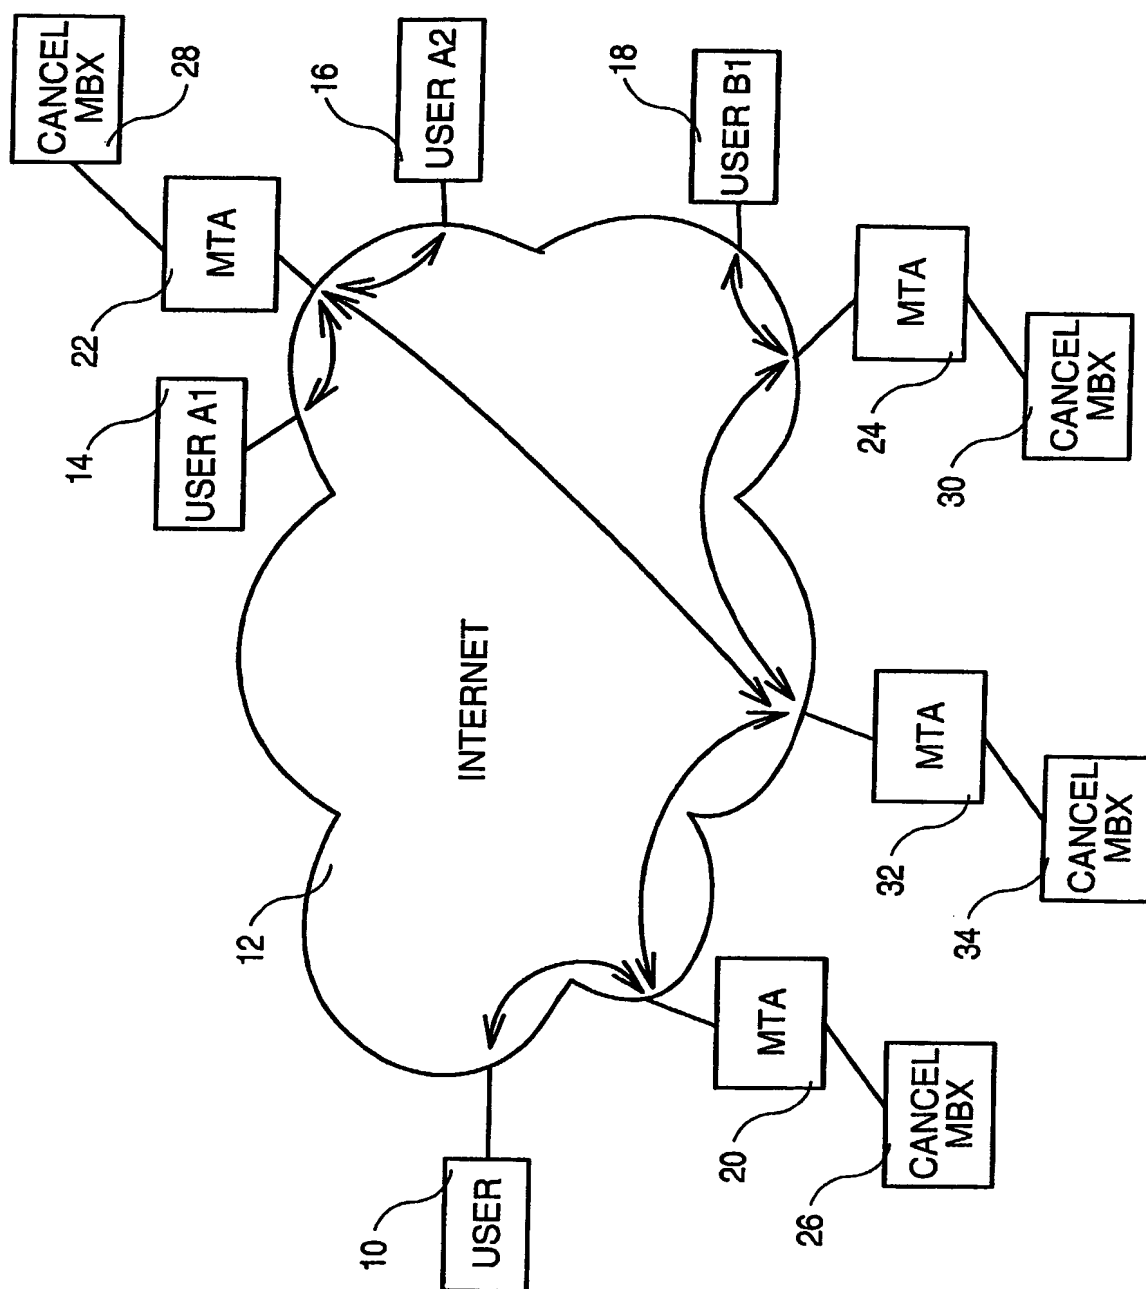


FIG. 4

5/11

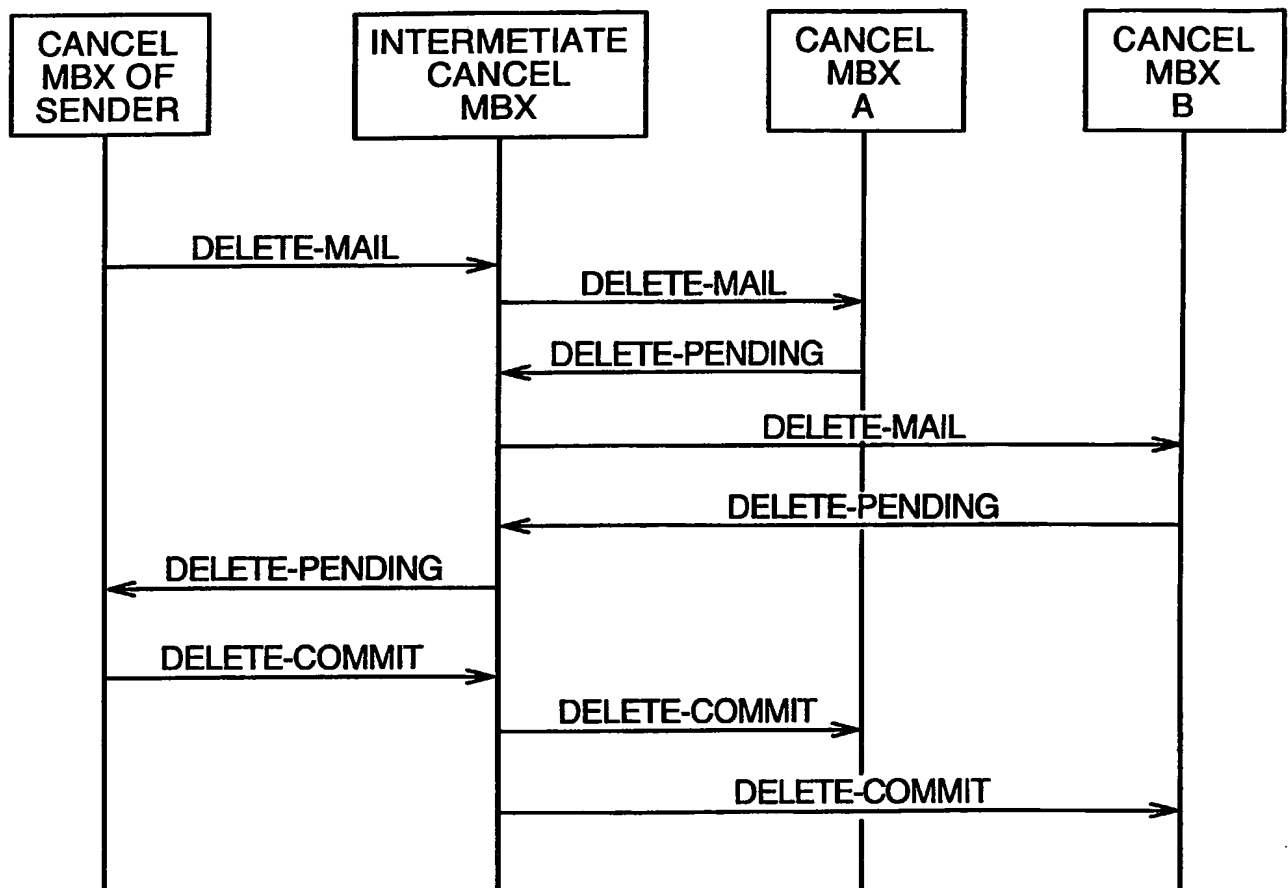


FIG. 5

6/11

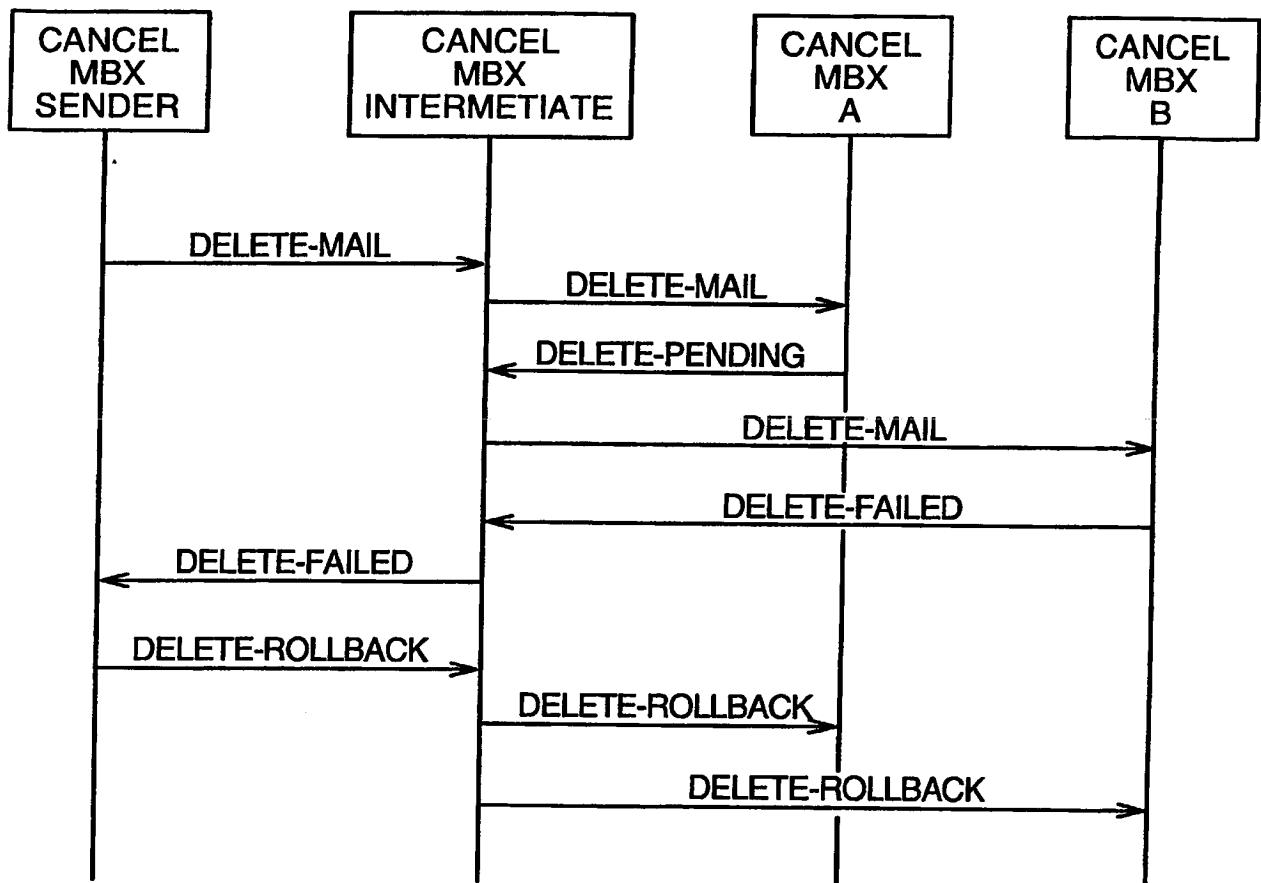


FIG. 6


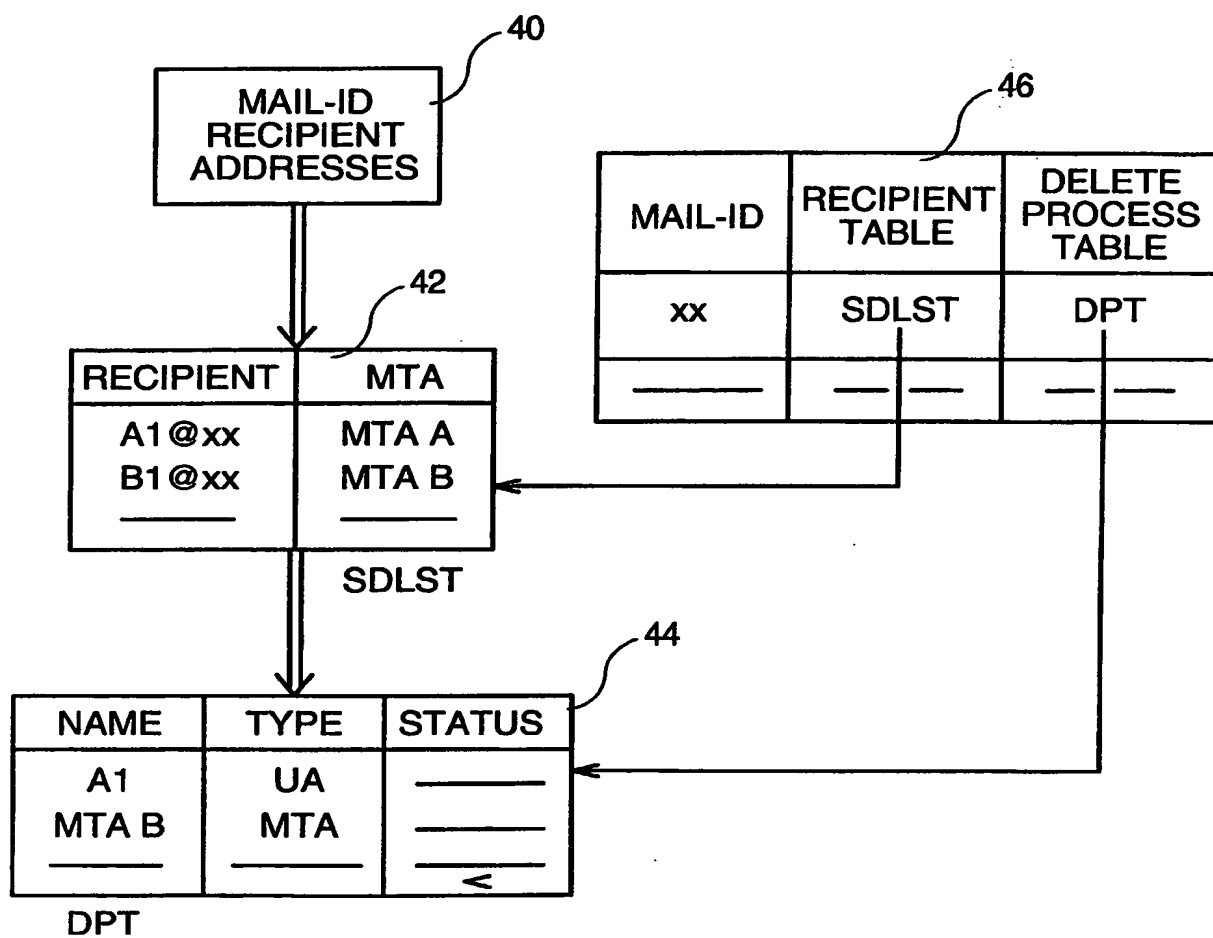


FIG. 7

8/11

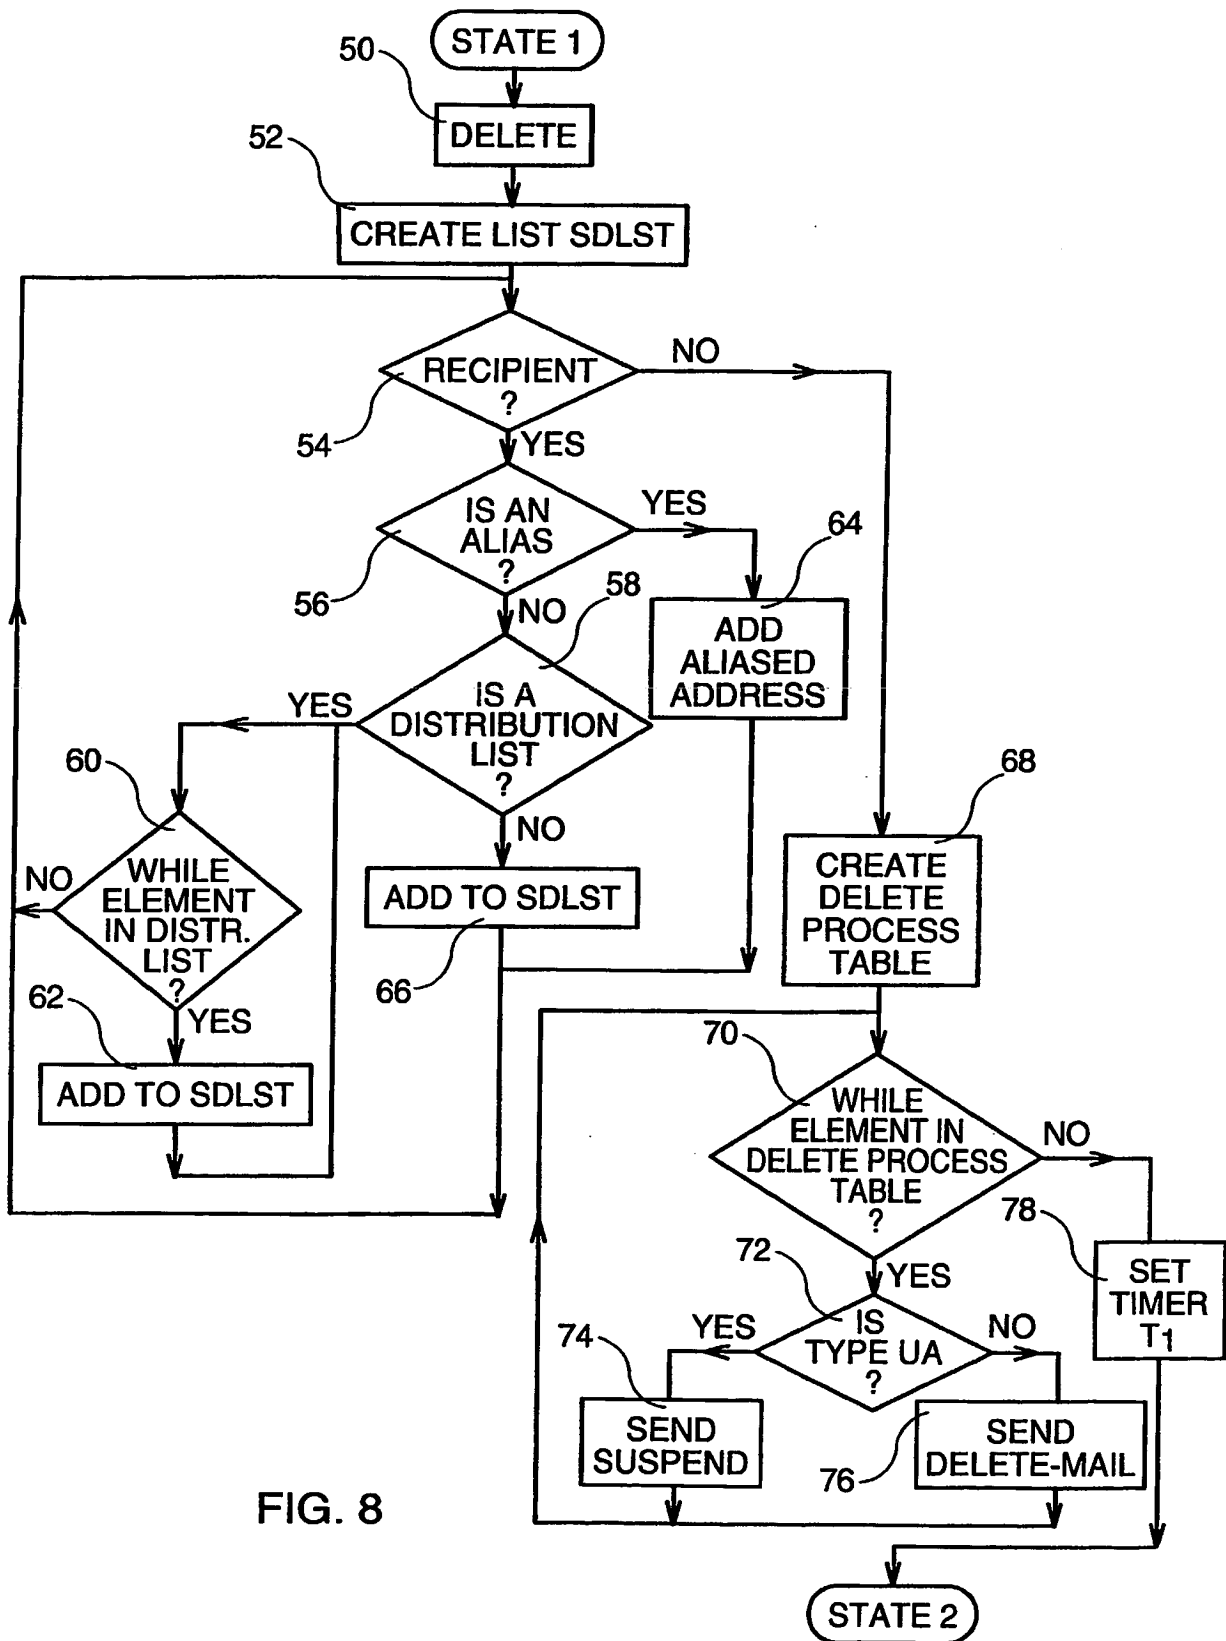

9/11

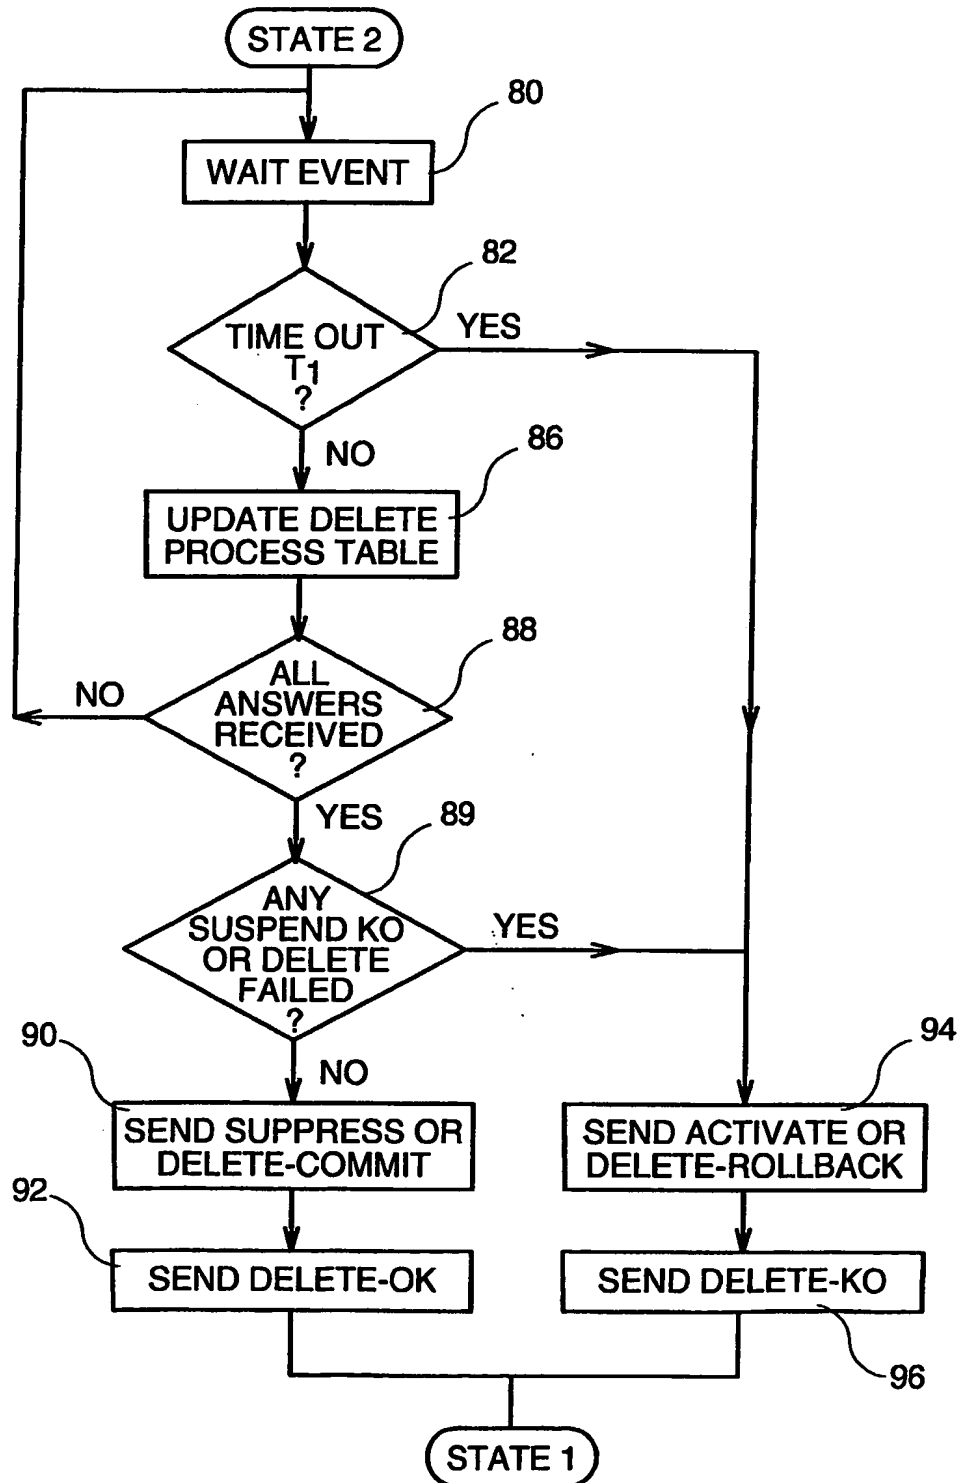


FIG. 9

10/11

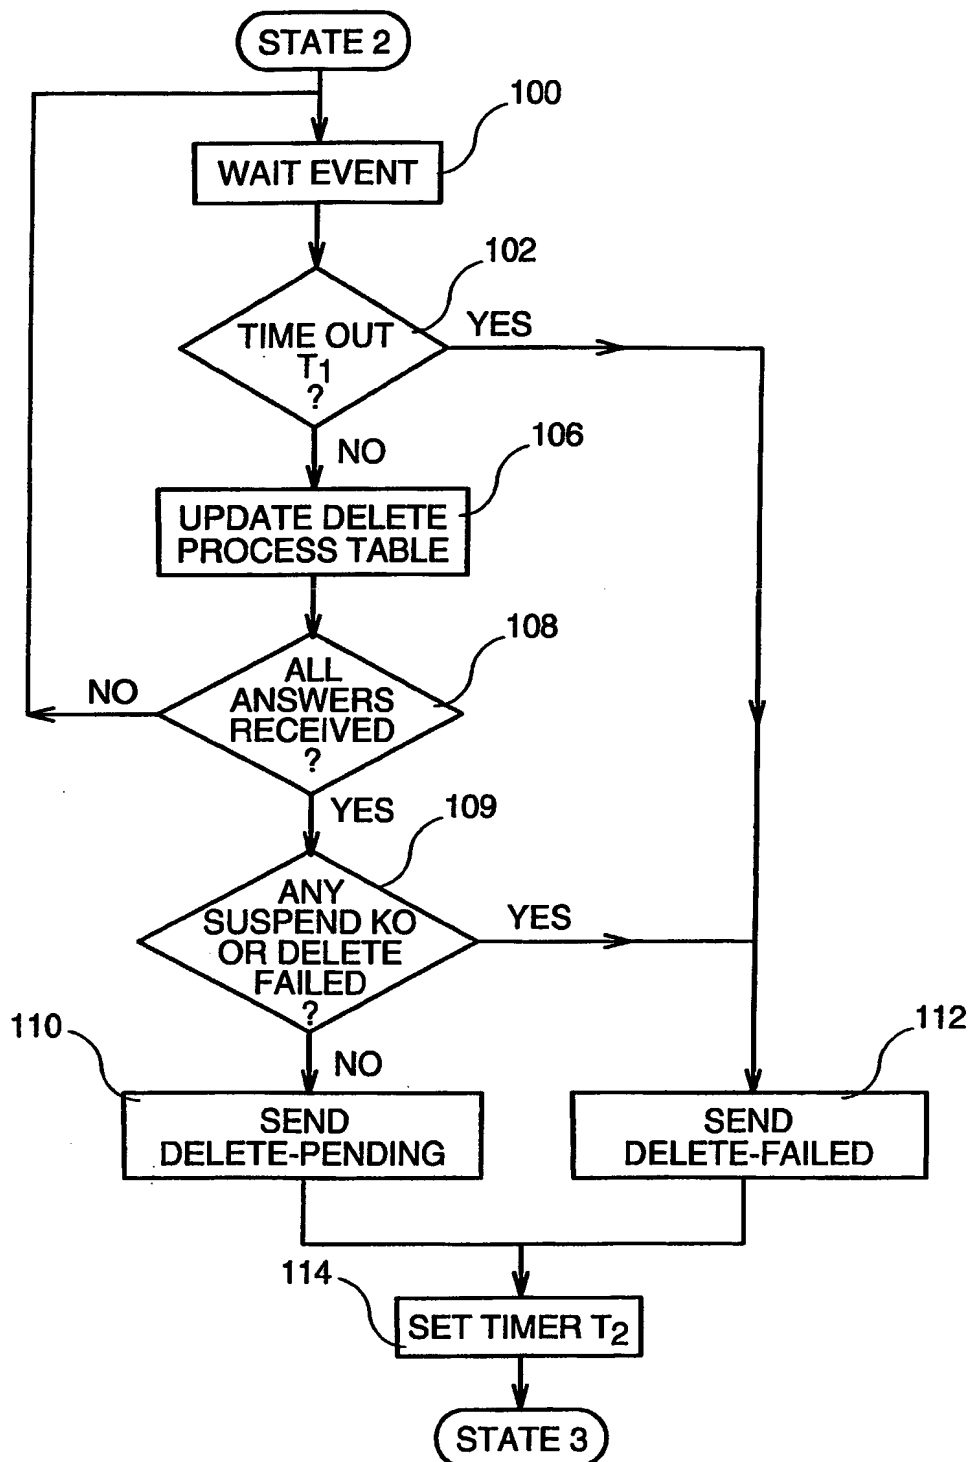


FIG. 10

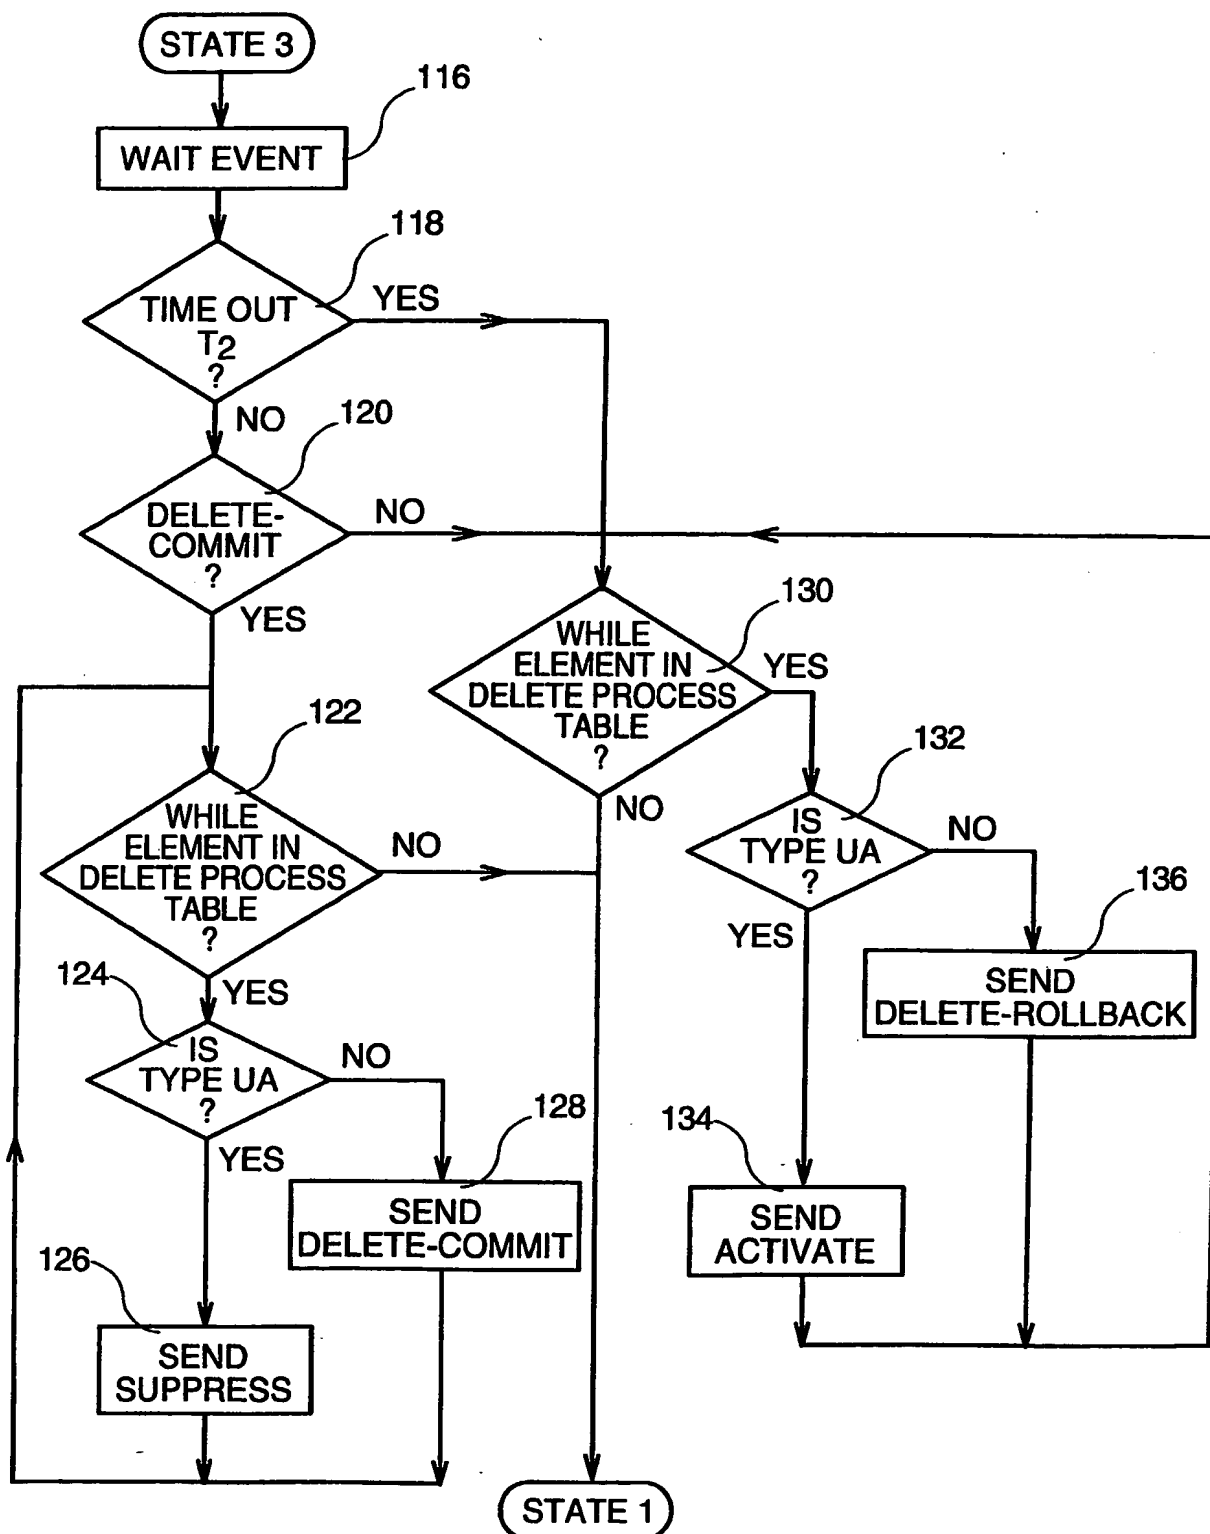


FIG. 11

THIS PAGE BLANK (USPTO)